

# **SELSAT > IP**™

## **World First SAT>IP Flat Satellite Antenna**




**SELSAT > IP21**


***8 different channels***

- **Slim and compact (optimum solution for SAT>IP)**
- **Supporting 8 different Smart devices simultaneously (Smart TVs, Tablets, Smartphones, PCs)**
- **2 legacy outputs for conventional DVB-S/S2 receiver**

## Home usage scenario diagram

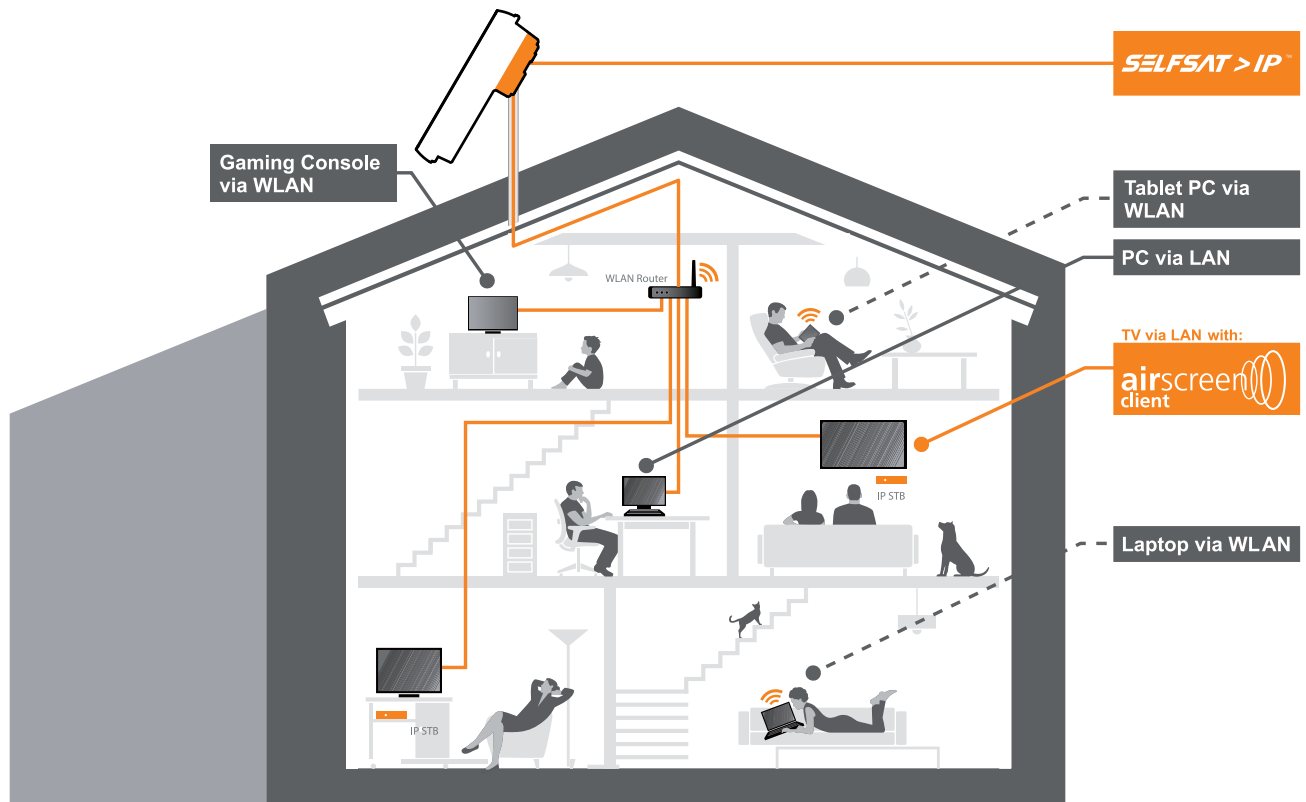

## Setup diagram

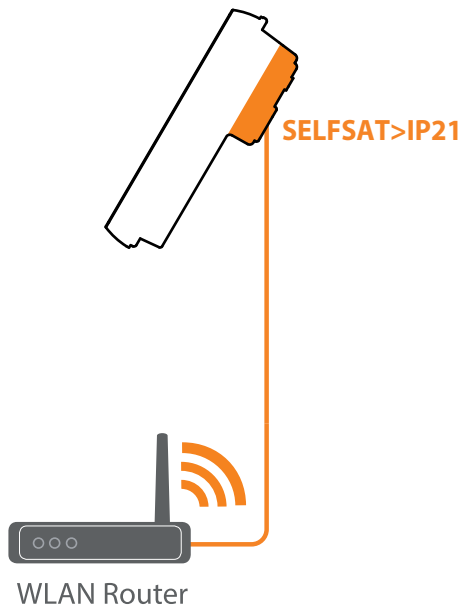

MODEL	SELFSAT>IP21
Input Satellite Frequency	10.7~12.75 GHz
Polarization	Vertical & Horizontal
Antenna Gain	<b>34.5 dBi @ 12.7 GHz</b>
Size(WxDxH)	566x300x65mm
Weight	7.0kg
Simultaneously Operating Channels	8 Channels
Operating Temperature	-30°C~+60°C
LNB Output	2 legacy 1 standard Ethernet cabling (Cat5e or above)
LNB Output Frequency	950~2150 MHz
L.O. Frequency	9.75GHz / 10.6GHz
LNB Supply Power (PoE IEEE 802.3af-2003)	48V +/- 10%
LNB Power Consumption (Class 3, PoE PD device)	9W (typ), 12.95W (max)

SELFSAT>IP lets you watch satellite broadcastings with your smart devices using Wi-Fi.

▶ **Best solution for SAT>IP : LNB integrated**



I DO IT Co., Ltd.

#637, Smart-Hub Industry-University Convergence Center, 237 Sangdaehak-ro, Siheung-si, Gyeonggi-do, Korea  
Tel : +82 (0)31 8041 1500 Fax : +82 (0)31 8041 1550 E-mail : sales@selfsat.com

I DO IT France

6-8 Rue de la Closerie ZAC Du Clos Aux Pois 91090 LISSES Cedex FRANCE  
Tel : +33 (0)1 64 97 52 28 Fax : +33 (0)1 64 97 52 35 E-mail : sales@selfsat.com